


QY-HYD-18/40-180KE

【一、产品参数Parameters/规格指标Specifications】

频率范围 Frequency Range	18000 ~ 40000 MHz
插入损耗 Insertion Loss	≤ 3.2 dB
主路驻波 Primary VSWR	Max.1.80
支路驻波 Secondary VSWR	Max.1.80
隔离度 Isolation	Min.12dB
幅度平衡 Amplitude Balance	Max. ±1.2dB
相位平衡 Phase Balance	±13°
阻抗 Impedance	50 Ohms
端口接头 Input/Output Connectors	2.92m-Female
承受功率 Power Rating	30W
工作温度 Operation Temperature	-45℃ ~ +85℃
表面处理 Surface Finishing	Black paint 黑色烤漆

【二、规格草图Draft specifications】

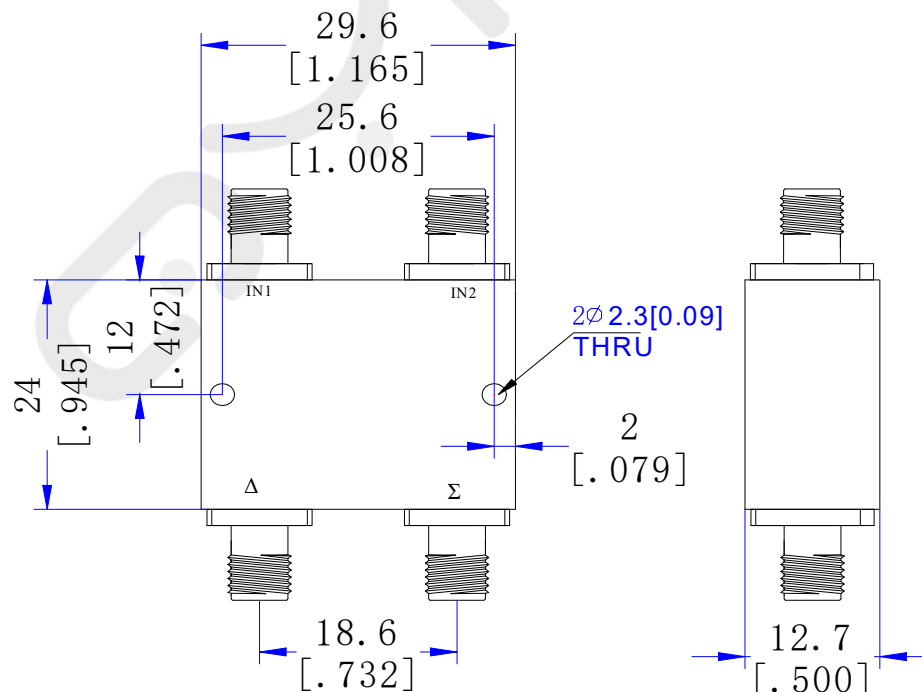

注: 尺寸(mm/[英寸]) , 一般公差(± 0.3)

Note: Dimensions (mm / [inch]), General tolerance (±0.3)